

Package Control

PACKAGE CONTROL (U.K.) Ltd.

Unit 20, Waterfront Business Park
Station Approach, Fleet, Hampshire
GU51 3QT United Kingdom
Tel: +44(0) 1252 815565
Fax: +44(0) 1252 816180
E-mail: sales@package-control.co.uk
www.package-control.co.uk


PACKAGE CONTROL (NEDERLAND) B.V.

Postbus 35, 4286 ZG Almkerk, Nederland
Industrieweg 28, 4283 GZ Giessen, Nederland
Tel: +31(0) 183 - 443700
Fax: +31(0) 183 - 443833
E-mail: sales@package.nl
www.package.nl

PACKAGE CONTROL (CZECH) s.r.o.

Vlastina 23, 161 01 PRAHA 6
Czech Republic
Tel.: +420 96400960
Fax.: +420 96400660
E-mail: sales@package.cz
www.package.cz

WWW.PACKAGE-CONTROL.CO.UK

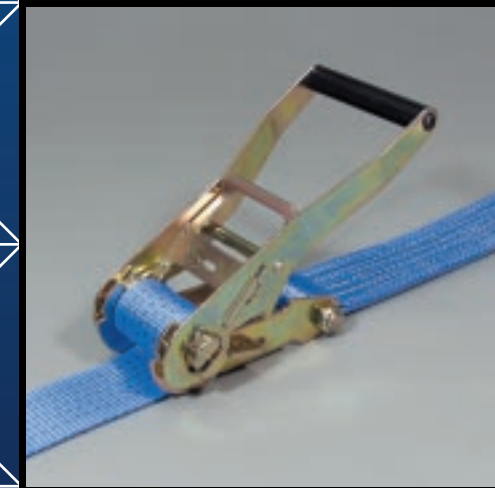

PC-LUK[®]

DON'T TRUST TO LUCK, TRUST PC-LUK[®]!!

Package Control (U.K.) Ltd.

Unit 20,
Waterfront Business Park
Station Approach,
Fleet, Hampshire
GU51 3QT United Kingdom
Tel: +44(0) 1252 815565
Fax: +44(0) 1252 816180
sales@package-control.co.uk
www.package-control.co.uk

PC-LUK® Strap Assemblies

PC-LuK® Strap assemblies are made to the latest BS-EN-12195-2 specifications. All our assemblies are made using the highest standard materials in order to meet or exceed the above specifications. Webbing lashing capacity strength has increased from 2:1 to 3:1 safety factor with the introduction of BS-EN-12192-2. We produce a range of standard size products together with assemblies made specifically for your operational requirements all carrying the reassuring PC-LuK (logo on its label. The label also contains a unique traceable serial number together with the maximum permissible lashing capacity, length of assembly and date of manufacture.



912-1515-1009


Extremely heavy-duty strap assembly using 75mm width webbing for environments requiring a 15000daN (Kg) webbing giving a maximum 5000daN lashing capacity.

911WH-1507-1007

Heavy-duty strap assembly using 50mm webbing for more regular applications requiring a 6000daN webbing giving a maximum 2000daN lashing capacity.

920-1507-1007

Heavy duty strap assembly using 50mm webbing for applications using the 'back' friendly 920 ergonomic ratchet buckle, but still giving a maximum 2000daN lashing capacity.

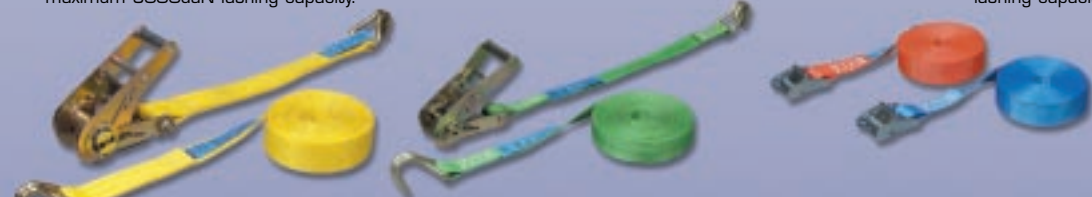

908-1509-1004

Medium duty strap assembly using 35mm webbing for regular applications but offering a more controllable maximum 1000daN lashing capacity.

909WH-1503-402

Light duty strap assembly using 25mm webbing for varied applications but still offering a maximum 500daN lashing capacity.

1252-1503E

Light duty strap assembly mainly used as an endless strap but securing a maximum of 100daN lashing capacity.


A SELECTION OF AVAILABLE END FITTINGS:



Recovery straps ▲▼



PC-LUK® Metalwork Load restraint

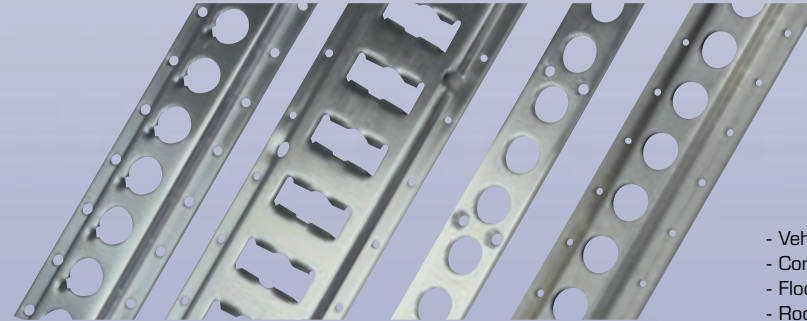

- Vehicle track, type 1806
- Combi track, type 3009
- Floorstrip, type 50 x 5
- Roof/Floor track, type 3005



Shoring Poles



Shoring Beams




Tilt Trailer "PlankKlamp"



Cargo Keeper with Hoops



Cargo Keeper

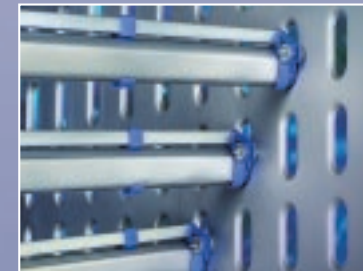

Garment Carrying Rails



VIP Lashing Chains ▼

